



**RH 125** | 50W Aluminum Horn Loudspeaker  
**RH 126** | 60W Aluminum Horn Loudspeaker



Expanding our RH lineup, the RH 125 (50W Aluminum Horn Speaker) and RH 126 (60W Aluminum Horn Speaker) form the new RH Aluminum Series, designed for high-power applications and demanding outdoor settings. These models share the RH Series' commitment to durability and performance, with their construction featuring the same high-quality aluminum and zinc die-casting. Like the RH 072, they are designed for use in a wide range of public facilities

and exceed the IP66 rating, demonstrating their capability to withstand harsh environmental conditions. Both the RH 125 and RH 126 are equipped with environmental test certifications, highlighting their endurance against extreme weather, dust, and water. Their ease of installation, with included mounting brackets, ensures they are not just powerful but also versatile solutions for outdoor sound distribution and speech reproduction.

- **Aluminum and Zinc Die-Casting Structure:** Ensures durability and longevity.
- **Ideal for Outdoor Announcements:** Perfect for public facilities such as airports, harbors, centers, buildings, factories, schools, civic centers, parking, and recreational facilities
- **High Durability:** Features an IP rating of IP66, surpassing the recommended level by European Standards for superior element resistance.
- **Environmental Test Certification:** Confirmed resistance to high and low temperatures, dust, and water.
- **Easy Installation:** Comes with brackets for hassle-free installation on ceilings, walls, buildings, and various structures.



RH 125



RH 126




**RH 125** | 50W Aluminum Horn Loudspeaker  
**RH 126** | 60W Aluminum Horn Loudspeaker

Technical Specification


	<b>RH 125</b>	<b>RH 126</b>
<b>Type</b>	1 Way Horn	1 Way Horn
<b>Rated Input</b>	50W	60W
<b>Frequency Response</b>	400HZ- 5Khz	400HZ- 5Khz
<b>SPL (1W/m)</b>	105dB	103dB
<b>Transformer Taps</b>	50W - 25W -12.5W -COM	60W - 30W -15W -COM (100V) 60W - 30W -15W -7.5W (70V)
<b>Normal Impedance</b>	8 Ω	16 Ω
<b>Operating Temperature</b>	-60C - 50C	-60C - 50C
<b>Dust &amp; Water Protection</b>	IP 66	IP 66
<b>Material &amp; Finish</b>	ALU/ RAL 7042	ALU/ RAL 7042
<b>Dimensions</b>	343 X 362 mm	323 X 357 mm
<b>Weight</b>	2.6 KG	2.8KG

Frequency Response

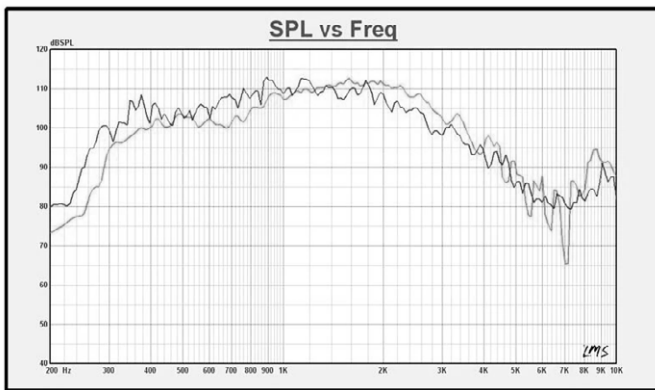

RH 125

\*at 1W/1m

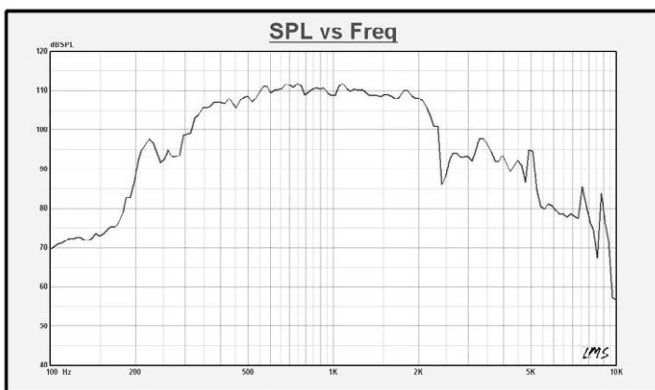

RH 126

\*at 1W/1m