



Embodying technological innovation and aesthetic discretion, the CA 562E Ceiling Loudspeaker offers unparalleled audio performance for a variety of spaces. Designed with a dedicated back enclosure and full mesh design, the CA 562E enhances sound clarity while remaining easy to mount, making it suitable for installations that prioritize acoustic performance without sacrificing visual appeal.

The CA 562E stands out for its superior craftsmanship, delivering clear, crisp sound in a sleek, compact package. It is perfectly suited for enhancing ambient music or ensuring clear announcements, adapting with elegance and efficiency to any setting. This ceiling loudspeaker is at the pinnacle of audio design, combining visual discretion with acoustic precision. Its innovative features make it a versatile choice for various applications, from corporate environments to retail spaces, providing unmatched sound quality and installation flexibility.

- **Full Mesh Design and Enclosure:** Enhances acoustic performance, providing a blend of functionality and aesthetics.
- **Flexible Installation:** Engineered for ease, the CA 562E fits discreetly into numerous architectural styles, requiring only a 150mm opening hole for installation.
- **High Sensitivity:** With a sensitivity of 90dB, it delivers clear and potent sound across a frequency range of 105Hz to 16KHz, maintaining clarity even at lower volumes.
- **Durable Construction:** Made with high-quality ABS for both the grille and enclosure, ensuring durability and a maintained appearance over time.




CA 562E

Technical Specification


	CA 562E
Rated Input	100 V : 6 W (6W - 3W-1.5W)
Impedance	1.667KΩ / 3.33 kΩ /6.67kΩ
Maximum Power	9 W
Frequency Response	105Hz - 16KHz
Sensitivity 1W @ 1m	90dB ±1dB
Coverage Angle (1kHz, -6dB)	120°
Speaker Component	Woofer: 120mm
Tweeter	NA
Safety	IEC-62368-1:2018
Opening Hole	150mm
Material & Finish	Enclosure: PP, white Mesh: Aluminium White
Dimensions	Ø171 x 88 mm
Weight	0.44 KG

Frequency Response

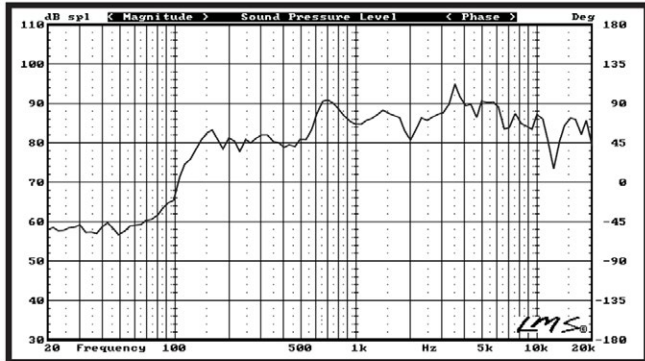

* at 1W / 1m

SPL Polar Plot

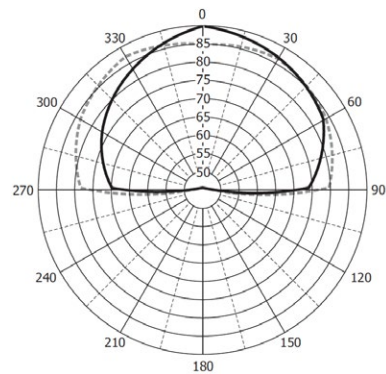

* at 1W / 1m

 — 1 kHz
 - - - 4 kHz
