



FG 52 | 20W Foreground Loudspeaker
FG 64 | 40W Foreground Loudspeaker



The FG Series introduces the FG 52 and FG 64 Surface Mount Loudspeakers, blending high-performance audio with sleek, contemporary design. These models stand out with their aluminium mesh construction, offering both visual appeal and durable quality. Designed to minimize depth for wall mounting, they provide flexible installation options and a reduced footprint, making them suitable for a wide range of applications.

Whether it's the more compact FG 52 or the powerful FG 64, each speaker is engineered to deliver exceptional sound quality, making them ideal for environments where space is at a premium but sound cannot be compromised. The FG 52 and FG 64 redefine expectations for surface mount loudspeakers, offering unmatched flexibility and audio performance in a compact, stylish package. Whether for background music, public announcements, or immersive listening experiences, these speakers are designed to exceed the demands of modern audio environments.

- **Elegant Aluminium Mesh Design:** Both models feature an aesthetically pleasing aluminium mesh that not only protects the speaker components but also complements modern interior designs.
- **Minimalist Depth:** Engineered to reduce wall protrusion, these speakers offer a sleek profile, allowing for discreet installation without sacrificing sound quality.
- **Versatile Installation:** Equipped with a flexible wall tilt bracket, the FG series provides ease of positioning, ensuring optimal sound direction and coverage for any space.
- **Wide Frequency Response:** The FG 52 covers a frequency range of 80Hz to 19KHz, while the FG 64 extends from 70Hz to 20KHz, ensuring full-range audio reproduction that captures every nuance.
- **Durable and Stylish:** The combination of ABS white enclosure and aluminium materials ensures longevity and maintains the speakers' visual appeal over time.




FG 52

FG 64

Technical Specification

	FG 52	FG 64
Rated Input	100 V : 20 W (20 - 10 - 5W)	100 V : 40 W (40 - 20 - 10W)
Impedance	500/1.0 kΩ/2.0 kΩ	250/500/1.0 kΩ
Maximum Power	30 W	50 W
Frequency Response	80HZ±5 ~ 19K±1	70HZ±5 ~ 20K±1
Sensitivity 1W @ 1m	92±1dB	93±1dB
Coverage Angle (1kHz, -6dB)	90° x 90°	90° x 90°
Speaker Component	Woofer: 135mm	Woofer: 166mm
Tweeter	Tweeter: 25mm Silk dome	Tweeter: 25mm Silk dome
Safety	IEC-62368-1:2018	IEC-62368-1:2018
Material & Finish	Enclosure: ABS, white Mesh : Aluminium Bracket: Aluminium Bracket, white	Enclosure: ABS, white Mesh : Aluminium Bracket: Aluminium Bracket, white
Dimensions	245*163*120mm	282*186*140mm
Weight	1.45kg	1.8kg

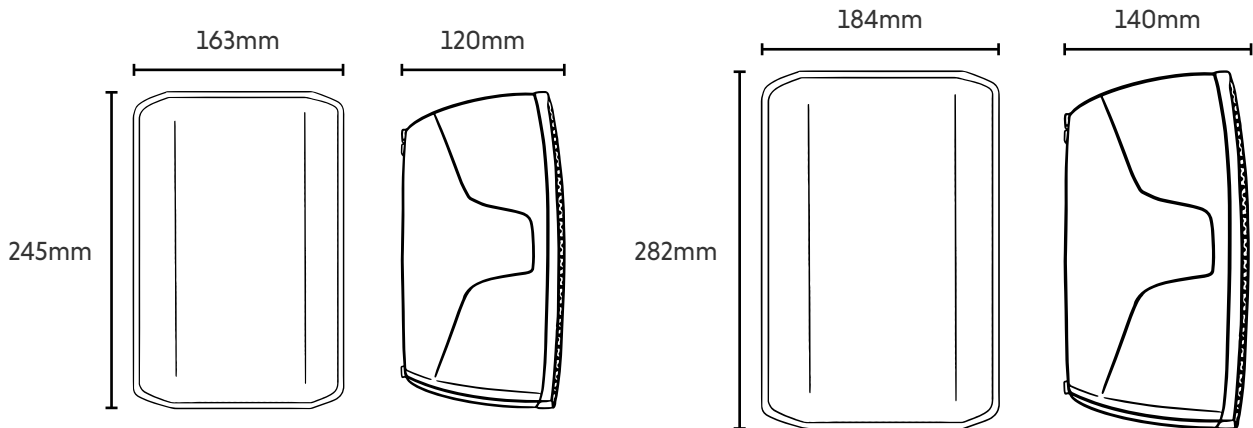

FG 52

FG 64