



**PD 510W • PD 520B** | 10W Pendant Loudspeaker  
**PD 520W • PD 520B** | 20W Pendant Loudspeaker



Elevating the standard for pendant audio solutions, the PD 510 and PD 520 series introduce a blend of sophistication and versatility in sound delivery. Available in both white (W) and black (B) finishes, these pendant loudspeakers are designed to cater to aesthetic preferences while providing exceptional sound quality. The PD 510W/B offers a 10W option for areas requiring clear, ambient sound, whereas the PD 520W/B steps up to 20W for environments needing more powerful audio coverage. Ideal for high ceiling spaces, these models combine sleek design with high-performance audio, ensuring seamless integration into any architectural style without compromising on sound quality.

The PD 510W/B and PD 520W/B series redefine what's possible with pendant loudspeakers, offering an elegant solution for enhancing the auditory experience in any setting. From sophisticated lounges to spacious retail environments, these speakers provide the perfect balance of form and function, ensuring that high-quality sound is always in reach.

- **Stylish Aesthetic Options:** Choose between crisp white or sleek black finishes to complement your space's design, offering flexibility in matching varied interior themes.
- **Optimized for High Ceilings:** The pendant design makes these speakers perfect for spaces with high ceilings, ensuring sound is distributed evenly across the area.
- **Superior Sound Quality:** Both models are equipped with a 135mm woofer, delivering rich and clear audio that enhances both music playback and speech intelligibility.
- **Versatile Power Options:** The PD 510W/B provides a 10W setting for ambient sound requirements, while the PD 520W/B offers up to 20W for greater sound projection in larger spaces.
- **Easy Installation:** Designed for simplicity, these pendant loudspeakers can be easily installed, allowing for quick and efficient setup without compromising on sound quality.




PD 510W  
PD 520W

PD 520B  
PD 510B

Technical Specification


	PD 510W	PD 520W	PD 510B	PD 520B
<b>Product Description</b>	Pendant Loudspeaker	Pendant Loudspeaker	Pendant Loudspeaker	Pendant Loudspeaker
<b>Rated Input</b>	100 V : 10 W (10 - 5W)	100 V : 20 W (20-10 W)	100 V : 10 W (10 - 5W)	100 V : 20 W (20-10 W)
<b>Impedance</b>	1.0 kΩ/2.0 kΩ	500/1.0 kΩ	1.0 kΩ/2.0 kΩ	500/1.0 kΩ
<b>Maximum Power</b>	20 W	30 W	20 W	30 W
<b>Frequency Response</b>	100Hz - 17KHz	100Hz - 18KHz	100Hz - 17KHz	100Hz - 18KHz
<b>Sensitivity 1W @ 1m</b>	92dB ±1dB	93dB ±1dB	92dB ±1dB	93dB ±1dB
<b>Coverage Angle (1kHz, -6dB)</b>	120°	120°	120°	120°
<b>Speaker Component</b>	Woofer: 135mm	Woofer: 135mm	Woofer: 135mm	Woofer: 135mm
<b>Safety</b>	IEC-62368-1:2018	IEC-62368-1:2018	IEC-62368-1:2018	IEC-62368-1:2018
<b>Material &amp; Finish</b>	Enclosure: ABS, white	Enclosure: ABS, white	Enclosure: ABS, black	Enclosure: ABS, black
<b>Dimensions</b>	Ø167*1000mm	Ø167*1000mm	Ø167*1000mm	Ø167*1000mm
<b>Weight</b>	0.8 kg	0.8 kg	0.8 kg	0.8 kg

Frequency Response

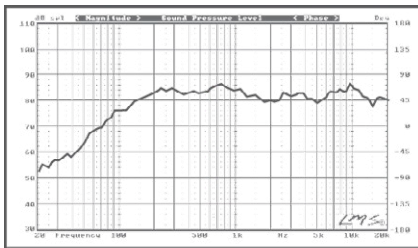

\* at 1W / 1m


PD 510W  
PD 510B

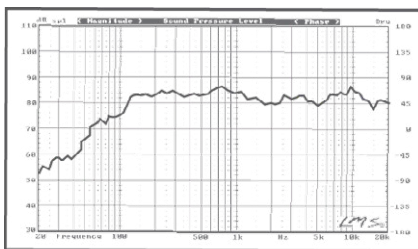


\* at 1W / 1m

PD 520W  
PD 520B

SPL Polar Plot



PD 510W  
PD 510B



PD 520W  
PD 520B

