

The C 460E represents the pinnacle of ceiling loudspeaker design, where functionality meets aesthetic elegance in a compact form. Engineered with a unique and beautiful geometric design, this speaker is not just an auditory device but a piece of art that complements any interior design. Its small footprint and lightweight construction belie its robust sound capabilities, making it an ideal choice for areas where clear announcements and background music are essential yet unobtrusive. The C 460E seamlessly integrates into your space, providing superior sound quality without sacrificing style. Designed with ease of installation in mind, it is perfect for environments requiring clear, intelligible sound without the visual clutter of traditional speakers.

- Delivers clear, natural speech and gentle background music through a wide-band driver tuned for even, consistent coverage.
- Even 120° coverage spreads sound smoothly and consistently across the listening area.
- 100 V line taps: 6 W, 3 W.
- Lightweight moulded polypropylene enclosure finished in white resists corrosion and knocks while staying light and quick to install.
- Ø179 × 65 mm, 360 g, dropping into a Ø150 mm cut-out for a clean, near-flush finish.
- Ideal for offices, retail interiors, waiting rooms and quiet public spaces where announcements and soft music share one system.




C 460E

Technical Specification

	C 460E
Rated Input	100 V : 6 W (6W - 3W)
Rated Impedance	1.7kΩ, 3.3kΩ
Maximum Power	9 W
Frequency Response	105Hz - 16KHz
Sensitivity 1W @ 1m	90dB ±1dB
Coverage Angle (1kHz, -6dB)	120°
Speaker Component	Woofer: 103mm
Tweeter	NA
Safety	IEC-62368-1:2018
Cutout Dimension	150mm
Material & Finish	Enclosure: PP, white
Dimensions	Ø179 x 65 mm
Weight	360 gram

Frequency Response

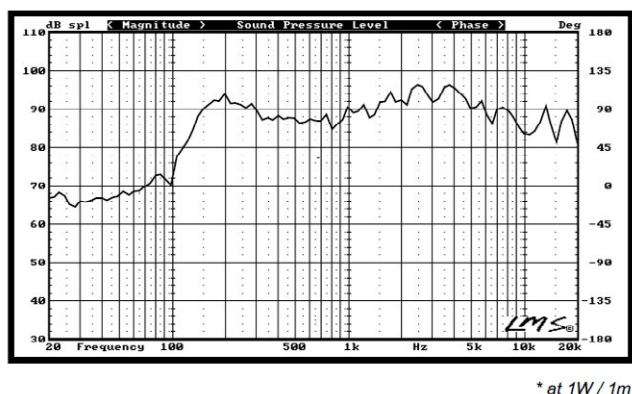

SPL Polar Plot

