

Integrating technological advancement with sleek design, the CA 561E Ceiling Loudspeaker delivers superior audio in a variety of settings. This model is specifically tailored for installations seeking an invisible audio solution, allowing for flawless integration into any space without the need for an enclosure. Its design ensures that it does not intrude on the room's aesthetics while providing clear and vibrant sound.

The CA 561E exemplifies exceptional craftsmanship, offering crisp, powerful audio performance in a compact, unobtrusive form. Ideal for ambient music or crystal-clear announcements, this speaker seamlessly meets the acoustic demands of any environment with style and effectiveness. Standing as a testament to refined audio engineering, the CA 561E merges discreet appearance with sound precision. Its thoughtful design positions it as a flexible option for a spectrum of applications, from office spaces to retail environments, guaranteeing superior sound quality and easy installation.

- Delivers clear, natural speech and gentle background music through a wide-band driver tuned for even, consistent coverage.
- Even 120° coverage spreads sound smoothly and consistently across the listening area.
- 100 V line taps: 6 W, 3 W, 1.5 W.
- Discreet moulded ABS enclosure finished in white, set behind an aluminium grille, resists moisture and impact while sitting light and unobtrusive in the ceiling or on the wall.
- Ø177 × 60, 0.4 kg, dropping into a Ø150 mm cut-out for a clean, near-flush finish.
- Ideal for offices, retail interiors, waiting rooms and quiet public spaces where announcements and soft music share one system.




CA 561E

Technical Specification


	CA 561E
Rated Input	100 V : 6 W (6W - 3W - 1.5W)
Rated Impedance	1.7kΩ, 3.3kΩ, 6.7kΩ
Maximum Power	9 W
Frequency Response	105Hz - 16KHz
Sensitivity 1W @ 1m	90dB ±1dB
Coverage Angle (1kHz, -6dB)	120°
Speaker Component	Woofer: 120mm
Tweeter	NA
Safety	IEC-62368-1:2018
Cutout Dimension	150mm
Material & Finish	Enclosure: ABS, white Mesh: Aluminium, white
Dimensions	Ø177 x 60
Weight	0.4KG

Frequency Response

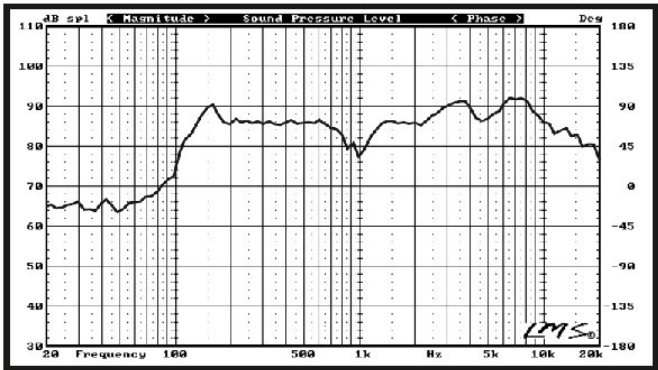

* at 1W / 1m

SPL Polar Plot

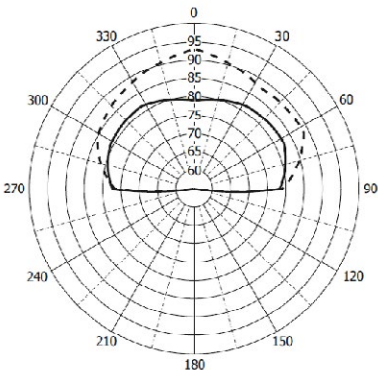

* at 1W / 1m

— 1 kHz
--- 4 kHz

