


The CF 561E(EN) Fire Rated Ceiling Loudspeaker is specially designed with a steel fire dome to prevent fire entering the cavity via the loudspeaker. The speaker is designed in compliance with EN 54-24 and BS 5839-1: 2002 standards. It is suitable for low ceiling applications such as shopping malls, supermarkets, offices and restaurants.

These ceiling loudspeakers are capable of reproducing voice announcements and background music with high clarity. The unit's impeccable sound quality and broadband frequency response are attributed to its 120 mm dual cone full range loudspeaker component to accurately reproduce the source signal with minimal sound discolouration.

Mounted on to a metal baffle and an aesthetically pleasing front metal mesh, the model comes with a multiple impedance line matching transformer, suitable for 70 V or 100 V distributed loudspeaker system with a maximum power handling of 6 W rated at 100 V.

- Delivers clear, natural speech and gentle background music through a wide-band driver tuned for even, consistent coverage.
- Certified to EN 54-24 for voice-alarm and life-safety announcement systems.
- 100 V line taps: 6 W, 3 W; 70 V line taps: 3 W, 1.5 W.
- Robust powder-coated steel construction finished in white is built to shrug off knocks and last through years of heavy-duty service.
- Ø200 × 100 mm, 1 kg, dropping into a Ø170 mm cut-out for a clean, near-flush finish.
- Ideal for offices, retail interiors, waiting rooms and quiet public spaces where announcements and soft music share one system.

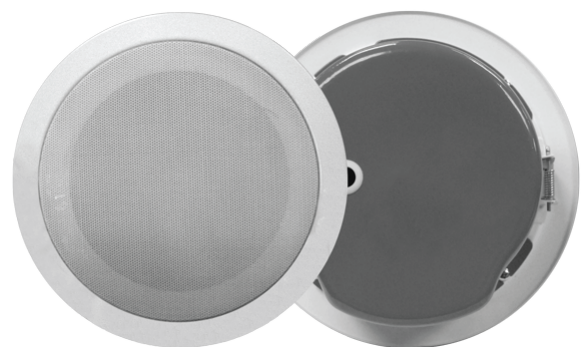


CF 561E(EN)

Technical Specification

	CF 561E(EN)
Rated Input	100 V : 6W (6W - 3W) 70 V : 3W (3W - 1.5W)
Rated Impedance	1.7kΩ, 3.3kΩ
Maximum Power	9 W
Frequency Response	90 Hz - 20 kHz
Sensitivity 1W @ 1m	91 / 99 dB
Coverage Angle (1kHz, -6dB)	180°
Speaker Component	120mm dual cone Full-range Loudspeaker
Safety	Acc. to EN 60065 • EN 54-24 • BS 5839-1: 2002
Safety Components	Thermistor, Capacitor, Ceramic connector
Enclosure	Spring Mounted
Certified	EN 54-24:2008
MTBF	350,000 hours
Material & Finish	Frame: Treated Steel, white Grille: Treated Steel, white Enclosure: Treated Steel, red
Dimensions	Dia. 200 x 100 mm
Weight	1 kg

Frequency Response

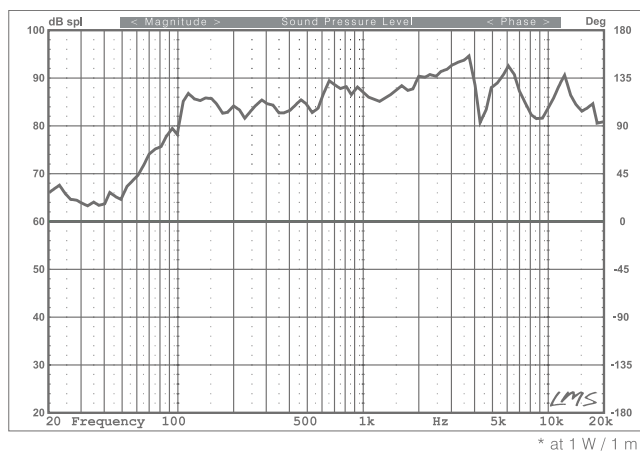

SPL Polar Plot

