

The WM 561W(EN), certified under EN 54-24:2008, offers excellent audio performance with its 120 mm dual-cone full-range transducer, ideal for noisy environments. Its sleek white ABS enclosure blends well with any décor, making it suitable for schools, offices, and retail spaces. The speaker ensures clear, reliable sound and maintains a professional appearance in any setting. It also includes a ceramic connector, thermistor, and capacitor for enhanced safety and performance. The Fire Retardant ABS material further ensures compliance with high safety standards.

- Delivers clear, natural speech and gentle background music through a wide-band driver tuned for even, consistent coverage.
- Certified to EN 54-24 for voice-alarm and life-safety announcement systems.
- Even 106° coverage spreads sound smoothly and consistently across the listening area.
- 100 V line taps: 6 W, 3 W, 1.5 W; 70 V line taps: 3 W, 1.5 W, 0.75 W.
- Discreet moulded ABS enclosure finished in white resists moisture and impact while sitting light and unobtrusive in the ceiling or on the wall.
- Compact 193 × 184 × 84 mm (W × H × D) body, 1.2 kg, easy to mount and position.
- Ideal for offices, retail and public-address zones.




WM561W(EN)

Technical Specification

	WM 561W(EN)
Rated Input	100 V : 6W (6W - 3W - 1.5W) 70 V : 3W (3W - 1.5W - 0.75W)
Rated Impedance	1.7kΩ, 3.3kΩ, 6.7kΩ
Maximum Power	9 W
Frequency Response	120 Hz - 20 kHz
Sensitivity 1W @ 1m	93 / 101 dB
Coverage Angle (1kHz, -6dB)	106 °
Speaker Component	120 mm Dual cone Full-range Loudspeaker
Certified	EN 54-24:2008
Safety	Acc. to EN 60065
Safety Components	Thermistor, Capacitor, Ceramic connector
Material & Finish	Enclosure/Case: Frame: Fire Retardant ABS, white
Dimensions	193 x 184 x 84 mm (W x H x D)

Frequency Response

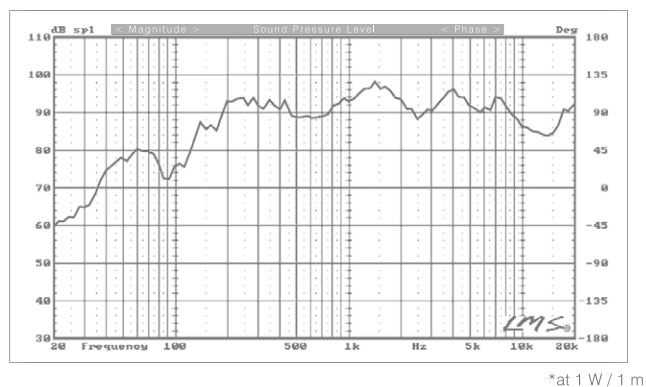

SPL Polar Plot

