

The FG Series introduces the FG 52 and FG 64 Surface Mount Loudspeakers, blending high-performance audio with sleek, contemporary design. These models stand out with their aluminium mesh construction, offering both visual appeal and durable quality. Designed to minimize depth for wall mounting, they provide flexible installation options and a reduced footprint, making them suitable for a wide range of applications.

Whether it's the more compact FG 52 or the powerful FG 64, each speaker is engineered to deliver exceptional sound quality, making them ideal for environments where space is at a premium but sound cannot be compromised. The FG 52 and FG 64 redefine expectations for surface mount loudspeakers, offering unmatched flexibility and audio performance in a compact, stylish package. Whether for background music, public announcements, or immersive listening experiences, these speakers are designed to exceed the demands of modern audio environments.

- Reproduces full-range music and speech with genuine fidelity for rich, room-filling sound.
- FG 52, 100 V line taps: 20 W, 10 W, 5 W.
- FG 64, 100 V line taps: 40 W, 20 W, 10 W, 5 W.
- Discreet moulded ABS enclosure finished in white or black, set behind an aluminium grille, resists moisture and impact while sitting light and unobtrusive in the ceiling or on the wall.
- FG 52, 245 × 163 × 120 mm, 1.45 kg, indoor rated.
- FG 64, 216 × 285 × 205 mm, 3.3 kg, IP65.
- Well suited to lobbies, retail, hospitality and foreground music installations.




FG 52


FG 64

Technical Specification

	FG 52	FG 64
Rated Input	100V : 20 W (20W - 10W - 5W)	100V : 40 W (4W0 - 20W - 10W)
Rated Impedance	0.5kΩ, 1.0kΩ, 2.0kΩ	0.3kΩ, 0.5kΩ, 1.0kΩ
Maximum Power	30 W	50 W
Frequency Response	80HZ±5 ~ 19K±1	70HZ±5 ~ 20K±1
Sensitivity 1W @ 1m	92±1dB	93±1dB
Coverage Angle (1kHz, -6dB)	90° x 90°	90° x 90°
Speaker Component	Woofer: 135mm	Woofer: 166mm
Tweeter	Tweeter: 25mm Silk dome	Tweeter: 25mm Silk dome
Safety	IEC-62368-1:2018	IEC-62368-1:2018
Material & Finish	Enclosure: ABS, white Mesh : Aluminium Bracket: Aluminium Bracket, white	Enclosure: ABS, white Mesh : Aluminium Bracket: Aluminium Bracket, white
Dimensions (W x H x D)	245 x 163 x 120 mm	282 x 186 x 140 mm
Weight	1.45kg	1.8kg

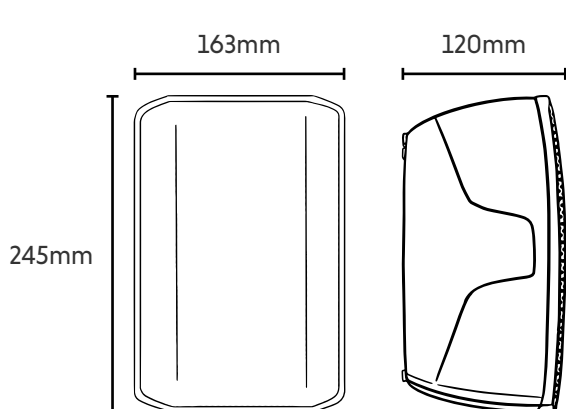

FG 52

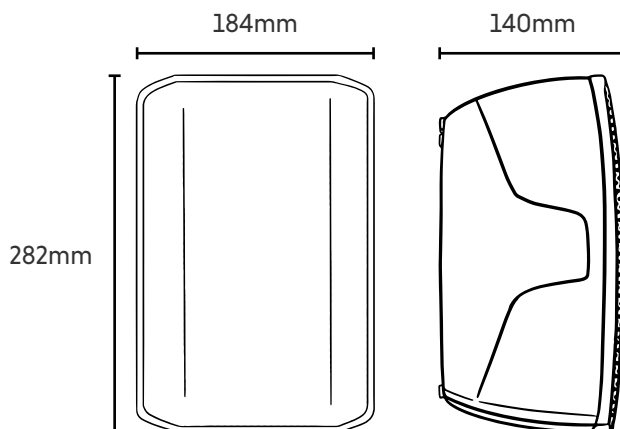

FG 64