


Introducing the HC Series HiFi 6inch, a pinnacle in our Hifi In-Ceiling/In-Wall Speaker category. This series/model name signifies a meticulous blend of high-fidelity sound and seamless integration, setting a new standard for audio excellence. Immerse yourself in a refined auditory experience with this speaker discreetly nestled in your ceiling or wall. Elevate your home audio setup with the HC Series HiFi 6inch, where sophisticated design meets uncompromising sound quality, delivering an immersive listening experience that redefines expectations in the Hifi In-Ceiling/In-Wall Speaker category.

- Reproduces music with genuine hi-fi fidelity, pairing a dedicated woofer and tweeter for crisp, detailed highs.
- HC 632, 100 V line taps: 30 W, 15 W, 7.5 W.
- HC 633, 100 V line taps: 30 W, 15 W, 7.5 W.
- Discreet moulded ABS enclosure resists moisture and impact while sitting light and unobtrusive in the ceiling or on the wall.
- HC 632, Ø248 × 97 mm, cut-out Ø208 mm, 2.2 kg.
- HC 633, 323 × 223 × 88 mm, cut-out 282 × 182 mm, 2.4 kg.
- Specified for hotels, restaurants, retail stores, boutiques, lounges and hospitality interiors.



HC 632

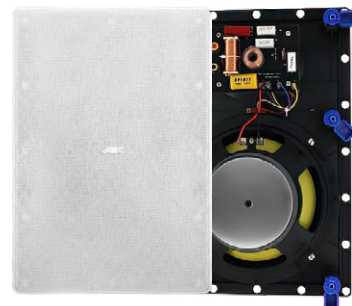

HC 633



HC 632 | 2-Way HiFi In-Ceiling Speaker

HC 633 | 2-Way HiFi In-Wall Speaker

Technical Specification

	HC 632	HC 633
Rated Input (RMS)	60W	60W
Peak Power Handling	120W	120W
Power Taps (100V)	30W, 15W, 7.5W	30W, 15W, 7.5W
Rated Impedance	0.3k Ω , 0.7k Ω , 1.3k Ω / 8 Ω	0.3k Ω , 0.7k Ω , 1.3k Ω / 8 Ω
Frequency Response	80Hz - 19kHz	80Hz - 19kHz
Frequency Range (-10 dB)	60Hz - 20kHz	60Hz - 20kHz
Sensitivity (1W/1m)	88dB	88dB
Maximum Peak SPL	109dB (Calculated)	109dB (Calculated)
Coverage Angle	120	110 x 120
Speaker Component	6.5" Kevlar Woofer + 0.76" Pivoting Silk Dome Tweeter	6.5" Kevlar Woofer + 0.76" Pivoting Silk Dome Tweeter
Tweeter EQ Control	+2dB / -2dB	+2dB / -2dB
Safety	EN IEC 62368-1	EN IEC 62368-1
Material & Finish	Enclosure: ABS, Grille: Steel	Enclosure: ABS, Grille: Steel
Connectors	Spring Clip Terminals	Spring Clip Terminals
Cutout Dimension	Ø 208 mm	282 x 182 mm
Dimensions	Ø 248 x 97 mm	323 x 223 x 88 mm
Weight	2.2 kg	2.4KG