



RH 125 | 50W Aluminum Horn Loudspeaker
RH 126 | 60W Aluminum Horn Loudspeaker



Expanding our RH lineup, the RH 125 (50W Aluminum Horn Speaker) and RH 126 (60W Aluminum Horn Speaker) form the new RH Aluminum Series, designed for high-power applications and demanding outdoor settings. These models share the RH Series' commitment to durability and performance, with their construction featuring the same high-quality aluminum and zinc die-casting. Like the RH 072, they are designed for use in a wide range of public facilities

and exceed the IP66 rating, demonstrating their capability to withstand harsh environmental conditions. Both the RH 125 and RH 126 are equipped with environmental test certifications, highlighting their endurance against extreme weather, dust, and water. Their ease of installation, with included mounting brackets, ensures they are not just powerful but also versatile solutions for outdoor sound distribution and speech reproduction.

- Engineered for powerful, long-throw voice paging and emergency announcements across wide, open areas.
- Fully weatherproof to IP66, ready for permanent outdoor mounting and regular wash-down.
- RH 125, 100 V line taps: 50 W, 30 W, 15 W (+COM); 70 V line taps: 50 W, 25 W, 15 W, 7.5 W.
- RH 126, 100 V line taps: 60 W, 30 W, 15 W (+COM); 70 V line taps: 60 W, 30 W, 15 W, 7.5 W.
- Die-cast aluminium construction finished in RAL 7042 shrugs off sun, salt, moisture and years of demanding outdoor service.
- RH 125, 500 × 463 mm, 2.9 kg.
- RH 126, 500 × 463 mm, 3.0 kg.
- Ideal for car parks, loading docks, stadiums, industrial yards and transport hubs.



RH 125




RH 126

Technical Specification


	RH 125	RH 126
Rated Input	50W - 25W - 12.5W - COM	100V : 60W - 30W - 15W - COM 70V : 60W - 30W - 15W - 7.5W
Rated Impedance	0.2k Ω , 0.4k Ω , 0.8k Ω / 8 Ω	0.2k Ω , 0.3k Ω , 0.7k Ω / 8 Ω
Frequency Response	400HZ- 5Khz	400HZ- 5Khz
SPL (1W/m)	105dB	103dB
Normal Impedance	8 Ω	16 Ω
Operating Temperature	-60C - 50C	-60C - 50C
Dust & Water Protection	IP 66	IP 66
Material & Finish	ALU/ RAL 7042	ALU/ RAL 7042
Dimensions	343 X 362 mm	323 X 357 mm
Weight	2.6 KG	2.8KG

Frequency Response

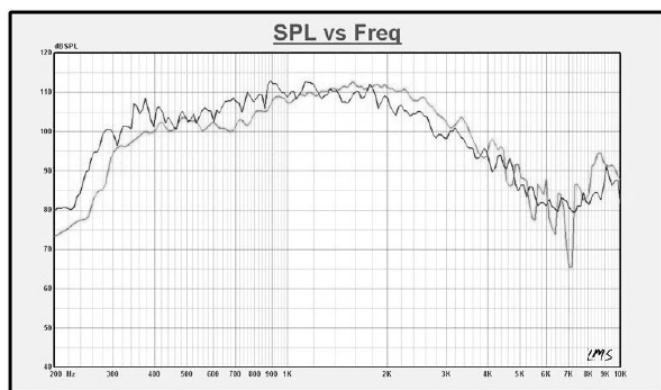

RH 125

*at 1W/1m

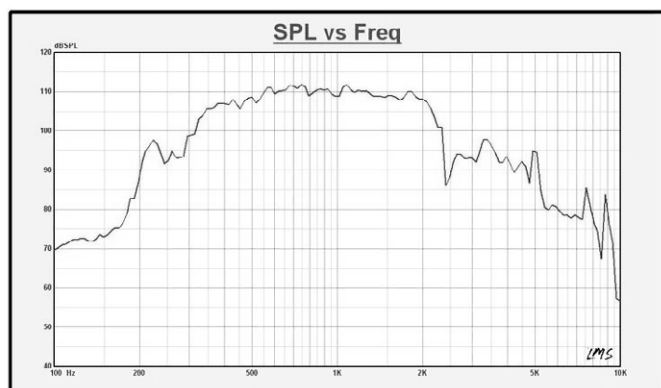

RH 126

*at 1W/1m