





WM 562 | 6W Surface Mounted Wall Loudspeaker
WM 511 | 12W Surface Mounted Wall Loudspeaker

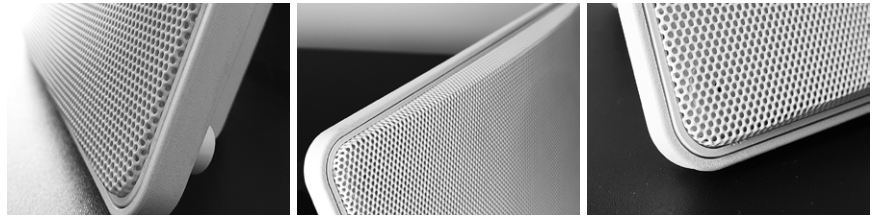


The WM Series introduces two exceptional models, the WM 562 and WM 511 Surface Mounted Wall Loudspeakers, designed to provide versatile and high-quality audio solutions for any space. The WM 562, with a 6W output, and the WM 511, offering a 12W output, are crafted to meet diverse audio needs, from subtle background music to clear, prominent announcements. Characterized by their thinnest depth and seamless mesh design, these speakers blend effortlessly into their surroundings while delivering superior sound performance.

Whether it's for retail environments, offices, or hospitality spaces, the WM series exemplifies sleek design combined with acoustic precision. The WM 562 and WM 511 set new standards for wall-mounted loudspeakers, offering unmatched versatility and sound quality in sleek, contemporary designs. Perfect for any application where space is at a premium but compromise on audio quality is not an option, these speakers ensure that superior sound is always within reach.

- Delivers clear, natural speech and gentle background music through a wide-band driver tuned for even, consistent coverage.
- WM 562, 100 V line taps: 6 W, 3 W, 1.5 W.
- WM 511, 100 V line taps: 12 W, 6 W, 3 W.
- Lightweight moulded polypropylene enclosure finished in white, set behind an aluminium grille, resists corrosion and knocks while staying light and quick to install.
- WM 562, 247 × 170 × 62 mm, 0.66 kg.
- WM 511, 247 × 170 × 62 mm, 0.68 kg.
- Ideal for offices, corridors, classrooms and general paging zones.

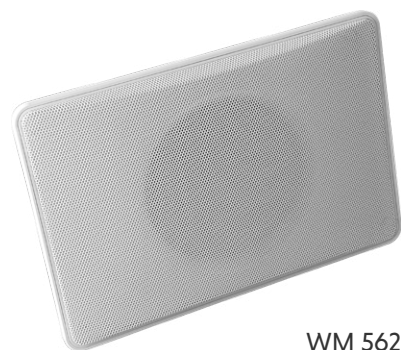

WM 562

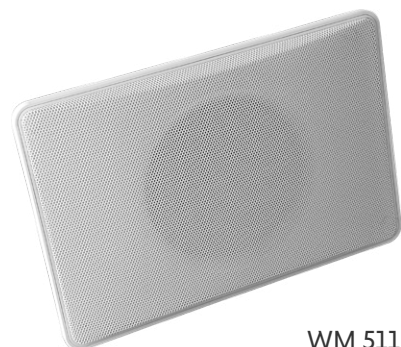


WM 511

Technical Specification

	WM 562	WM 511
Rated Input	100 V : 6 W (6W - 3W-1.5W)	100 V : 12 W (12 - 6 - 3 W)
Rated Impedance	1.7kΩ, 3.3kΩ, 6.7kΩ	0.8kΩ, 1.7kΩ, 3.3kΩ
Maximum Power	9 W	15 W
Frequency Response	100Hz-16KHz	100Hz-20KHz
Sensitivity 1W @ 1m	92±1 dB	94±3 dB
Coverage Angle (1kHz, -6dB)	120°	min 120°. max 160°
Speaker Component	Woofer: 135mm	Woofer: 166mm
Safety	IEC-62368-1:2018	IEC-62368-1:2018
Material & Finish	Enclosure: PP, white Mesh : Aluminium	Enclosure: PP, white Mesh : Aluminium
Dimensions	247 x 170 x 62MM	247 x 170 x 62MM
Weight	0.66 kg	0.68 kg


Frequency Response

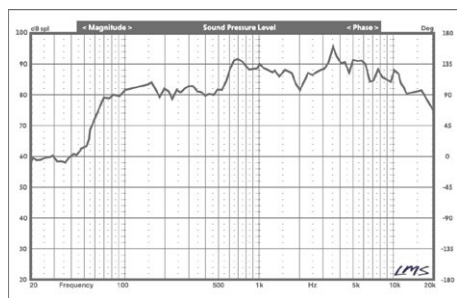

*at 1W / 1m


WM 562

SPL Polar Plot




— 1 kHz
- - - 4 kHz

WM 562

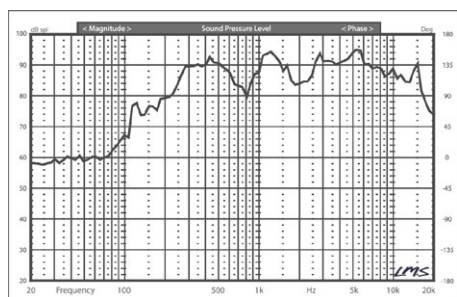

*at 1W / 1m

WM 511



— 1 kHz
- - - 4 kHz

WM 511

